


Sketch with main dimensions

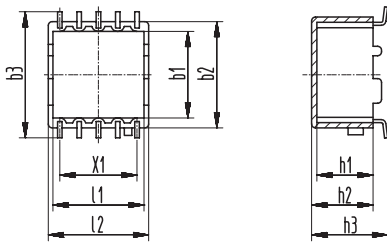

Boxes with pins 0,4 x 0,6 mm, preferably for ISDN interface transducers.

Available fully fitted only.

Standard material: PPS - GV
(Polyphenylensulfide UL94-V0)

Special material on request.


Pattern for X 1:

Wz 7658

2,54 5,08 2,54




Box for toroids
for SMD mounting



b1 ±0,2	b2 ±0,2	b3 ±0,3	h1 ±0,2	h2 ±0,2	h3 ±0,2	l1 ±0,2	l2 ±0,2	X1 ±0,2	X3 ①	Type	Art.- No.
8,8	11,5	14,4	5,5	6,6	7,6	8,7	9,9	3x2,54	2x4	VR-SMD 9/9 - 8 Wz 7767	3490
11,5	13,9	16,6	7,5	8	10	12	13,1	2x2,54 1x5,08	2x4	VR-SMD 11/12 - 8 Wz 7658	3369
11,5	13,9	16,6	7,5	8	10	12	13,1	4x2,54	2x5	VR-SMD 11/12 - 10 Wz 7664	3373

Sketch with main dimensions

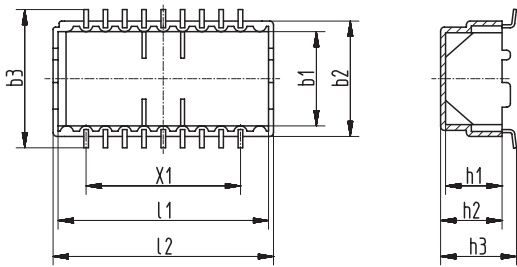


Boxes with pins 0,4 x 0,6 mm, preferably for ISDN interface transducers.

Available fully fitted only.

Standard material: PPS - GV
(Polyphenylensulfide UL94-V0)


Special material on request.

Box for toroids
for SMD mounting



b1 ±0,2	b2 ±0,2	b3 ±0,3	h1 ±0,2	h2 ±0,2	h3 ±0,2	l1 ±0,2	l2 ±0,2	X1 ±0,2	X3 ①	Type	Art.- No.
12,4	15,2	18,3	7,6	8,1	10	28	29	8x2,54	2x9	VR-SMD 12/28 - 18 Wz 7612	3299

Sketch with main dimensions

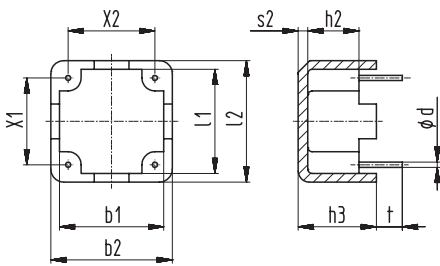

Preferably used for storage and suppressor chokes.


With molded-in pins \varnothing 0,6 mm.

Only fully pinned available.

Standard material: Ultramid A3 X2 G5, black

Special material on request.

Box for toroids,
horizontal version



b1 ±0,2	b2 ±0,2	h2 ±0,2	h3 ±0,2	l1 ±0,2	l2 ±0,2	s2 ±0,2	t ±0,3	X1 ±0,3	X2 ±0,3	X3 ①	Type	Art.- No.
12	14	6	9	12	14	1	4	10	10	4	VDL 11 x 9 Wz 7847	3594

① X3 = max. number of slots or terminals